


CSB - SLOT DRAIN
PROFILE VIII

NEW PRODUCT



Slot drains with perpendicular side walls

See www.csbeton.cz for tips, advice and product information.

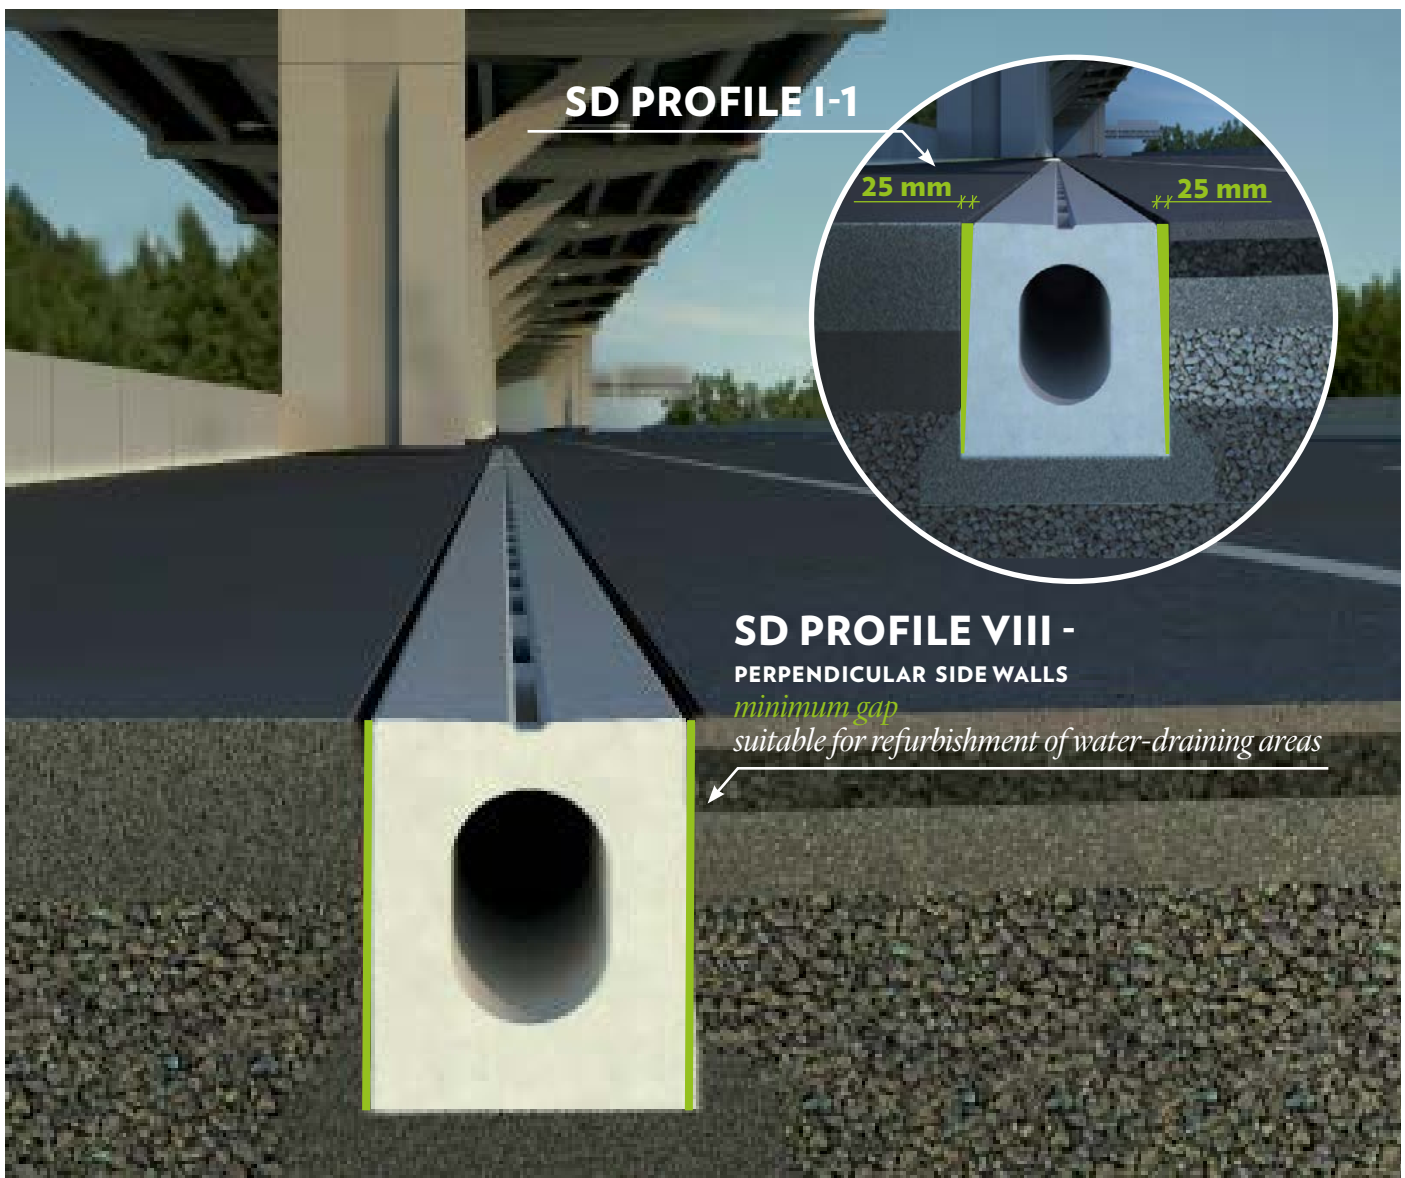

CSB - SLOT DRAIN **PROFILE VIII**

Slot drains with perpendicular side walls

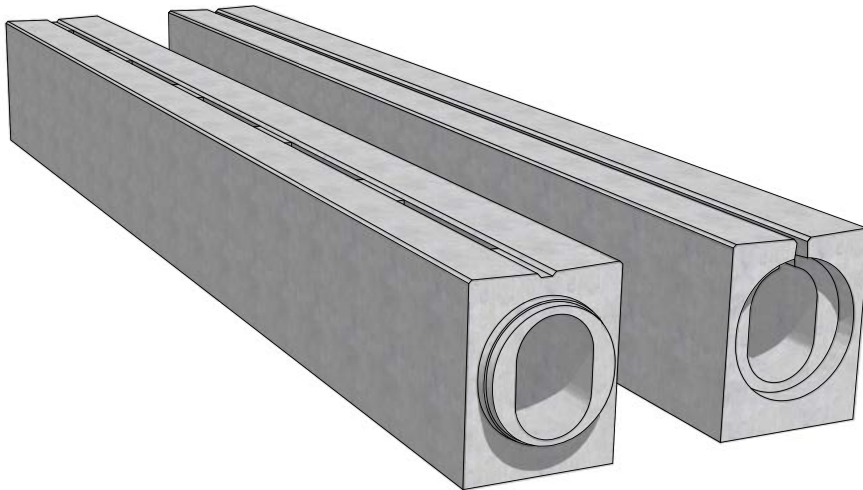

THE BEST REFURBISHMENT SOLUTION

During refurbishment of drained surfaces, the use of our standard slot drain products with slightly sloped sides is less practical because a gap of at least 25 mm would appear between the pipe and the surface edge. To prevent this unwanted phenomenon, we introduced a new type of slot drain segment with perpendicular side walls.

This new type of slot drain keeps all the advantages of our other standard profiles, but simplifies the installation process of a slot drain during refurbishment by:

- **CREATING A STRAIGHT PERPENDICULAR MINIMUM GAP**
- **SIMPLE AND EASY TO USE OPTION FOR RECONSTRUCTION**
- **THE VOLUME OF GROUT NECESSARY FOR SEALING**

This type of our most popular slot drain is offered across the entire portfolio, i.e. with internal gradient, elevated bottom, etc. Available bespoke lengths are between 0.5 and 4 m and can be altered by multiples of a centimetre.

Name	Order code	Nominal dimensions* mm			Quantity	Weight
		Basic height	Length	Width	pcs/m	pcs
Slot drain with perpendicular side walls with continuous slot	VIII-0	500	4000	400	0,25	1378
Slot drain with perpendicular side walls with 0.5% bottom gradient and continuous slot	VIII-0-G	500	4000	400	0,25	1387
Slot drain with perpendicular side walls with intermittent slot	VIII-1	500	4000	400	0,25	1378
Slot drain with perpendicular side walls with 0.5% bottom gradient and intermittent slot	VIII-1-G	500	4000	400	0,25	1387