


CSB - SLOT DRAIN PROFILE VIII

NEW PRODUCT

Slot drains with drainage openings with perpendicular side walls

See www.csbeton.cz for tips, advice and product information.

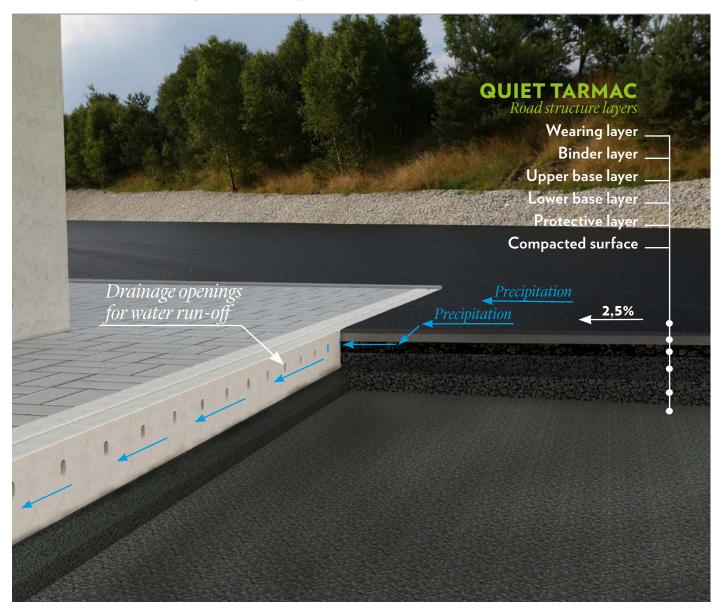





CSB - SLOT DRAIN

PROFILE VIII

Slot drains with drainage openings with perpendicular side walls

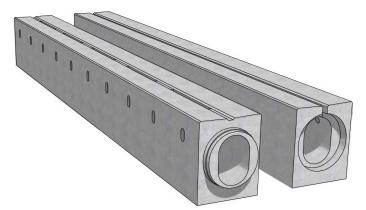



IDEAL SOLUTION FOR WATER DRAINAGE FROM QUIET ASPHALT SURFACES

- Quiet or drainage asphalt is gaining popularity these days. It's higher water-draining ability brings along new requirements
 on water draining from roads. Roads made of quiet asphalt need to have water drained from both the surface and the road
 core.
- Our innovative Profile VIII fully complies with these new requirements, because the slot drain's side wall also includes small
 drainage openings to drain water from the road's core.
- This type of drains has perpendicular side walls to ensure tight fit to the asphalt surface and to prevent gaps. This also simplifies installation of new slot drain segments during refurbishments.
- Profile I portfolio includes all regular features (i.e. internal grade, elevated bottom pieces and bespoke lenghts from 0,5 to 4 m).

Name	Order code	Nominal dimensions* mm			Quantity	Weight
		Basic height	Length	Width	pcs/m	pcs
Slot drain with perpendicular side walls with 0.5% bottom gradient and continuous slot, with drainage openings (left/right)	VIII-o-DL-G	500	4000	400	0,25	1384
Slot drain with perpendicular side walls with continuous slot and drainage openings (left/right)	VIII-o-DP	500	4000	400	0,25	1374
Slot drain with perpendicular side walls with continuous slot and drainage openings (two-sided)	VIII-o-DO	500	4000	400	0,25	1371
Slot drain with perpendicular side walls with 0.5% bottom gradient and continuous slot, with drainage openings (two-sided)	VIII-o-DO-G	500	4000	400	0,25	1380
Slot drain with perpendicular side walls with interrupted slot and drainage openings (left/right)	VIII-1-DL	500	4000	400	0,25	1374
Slot drain with perpendicular side walls with 0.5% bottom gradient and interrupted slot, with drainage openings (left/right)	VIII-1-DL-G	500	4000	400	0,25	1384
Slot drain - perpendicular with interrupted slot and drainage openings (two-sided)	VIII-1-DO	500	4000	400	0,25	1371
Slot drain with perpendicular side walls with 0.5% bottom gradient and interrupted slot, with drainage openings (two-sided)	VIII-1-DO-G	500	4000	400	0,25	1380
					Var 10 - 1	8 10 2010

Ver 1.0 - 18. 10. 2019